




BIGHANNA[™] composter

MODEL T240

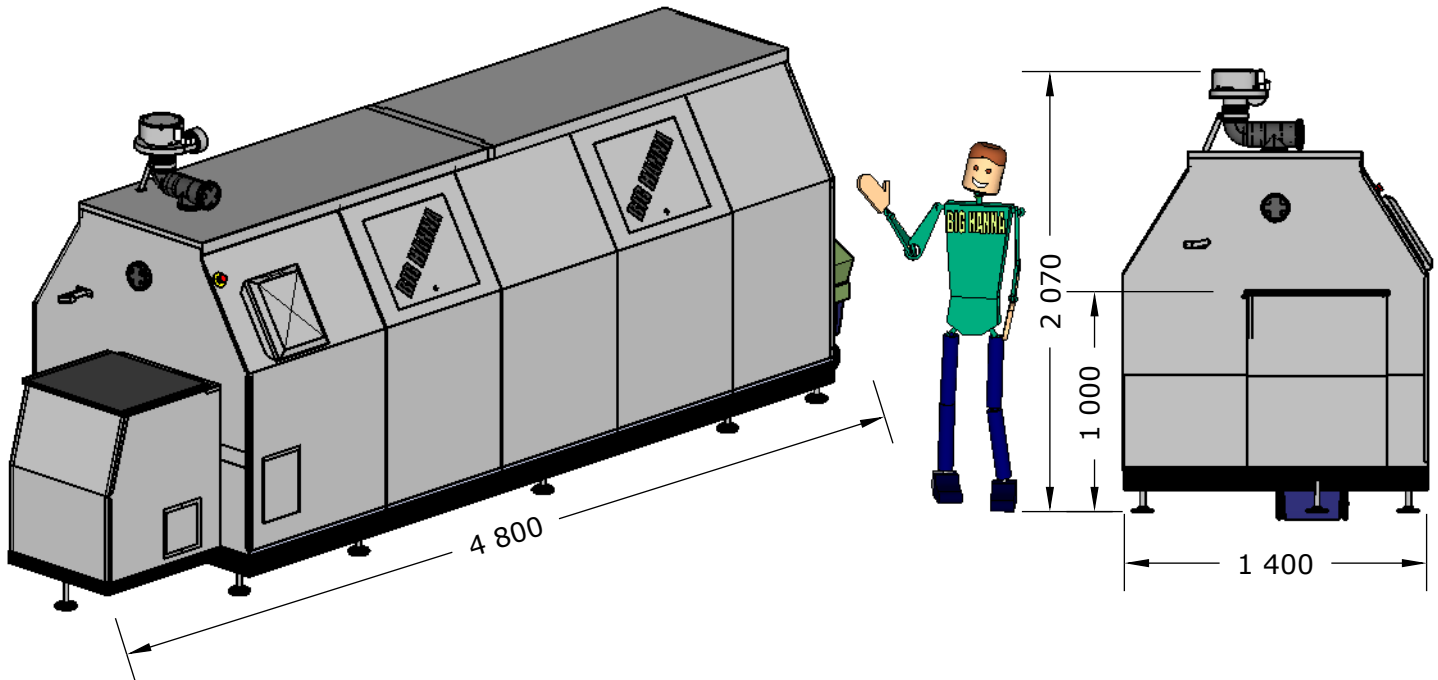

Capacity*)

Kg/day	55-170
Kg/week	400-1200
Tons/annum	21-62
Number of households	130-300

GHG Emissions avoided
calculated on www.epa.org using WARM

GHG Emissions Landfilled	98
GHG Emissions Composted	-14
GHG Emissions Savings	-112

Capacity in combination with dewaterer *)

Kg/day	90-275
Kg/week	650-1 900
Tons/annum	33-100

Electrical supply)**

Power supply 400V, 3-phase, 50 Hz, 16A

Power consumption *)**

Total kWh/day, standard model 1,53

*) The capacity varies depending on content / mix of food waste, moisture content, absorbent material, biological process and how the machine is fed and programmed. The macerator / dewatering equipment reduces the volume and weight of the food waste and increases the capacity, i.e. more food waste can be recycled. See separate information.

**) Standard models. Other electrical supply can be specified at order (for example 1-phase).

***) The electrical power consumption is calculated for indoor installations. The heater is only used in cold temperatures and only when the temperature between the hood and the cylinder is lower than 5-10° C. This is not included in the electrical power consumption.

Equipment

Temperature sensors	4
Optional logging program	✓
Optional shredder	✓
Optional bin lift	-
Inspection door(s) on hood	2
Access door(s) in to cylinder	2
Visual digital display	✓

Measurements

Length	4 800 mm
Width	1 400 mm
Height	2 070 mm
Volume cylinder	4 m³
Weight empty	1 200 kg
Max weight full	3 500 kg
Number of supports/feet on machine	11
Connection to ventilation	Ø110 mm
Height inlet	appr. 1 000 mm
Inlet measurements	490 x 590 mm
Height under outlet	630 mm
Volume inlet	80 litre
Connection for drain on inlet	Ø75/110 mm



© Susteco AB reserves the right to modify, at any time and without notice, any or all of its products' features, designs, components and specifications.



BIGHANNA[™] composter



BINLIFT HANNA

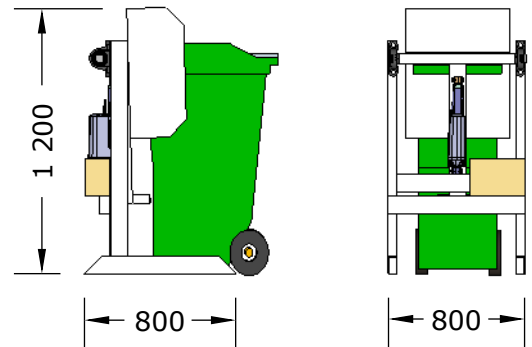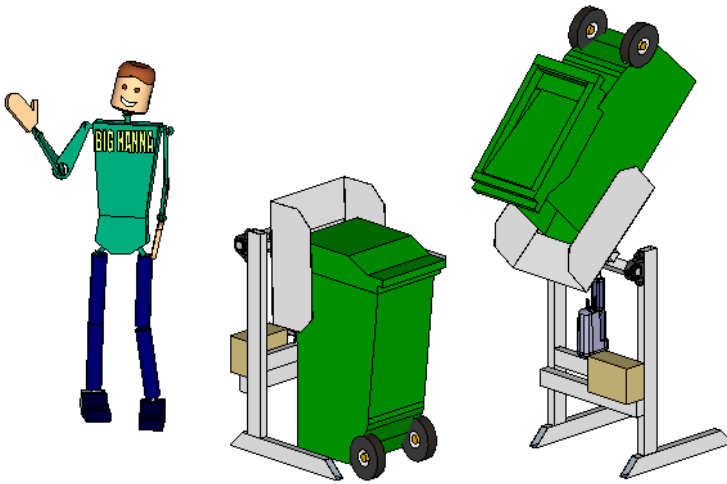

Features

Bins	80 litre
Max load	100 kg
Electrical supply	
Power supply	230V
Ampere	10A
Measurements	
Length	800 mm
Width	800 mm
Height	1 200 mm
Minimum height ceiling when bin lift is installed	2 300 mm

*) 80 litre bins are delivered with the bin lift. Alternatively bins can be specified at order.

© Susteco AB reserves the right to modify, at any time and without notice, any or all of its products' features, designs, components and specifications.

