
# **RECEIVED**

By Liv Rickman at 10:20 am, Oct 21, 2024


# FLAGPOLE - ELEVATION VIEW 1:50

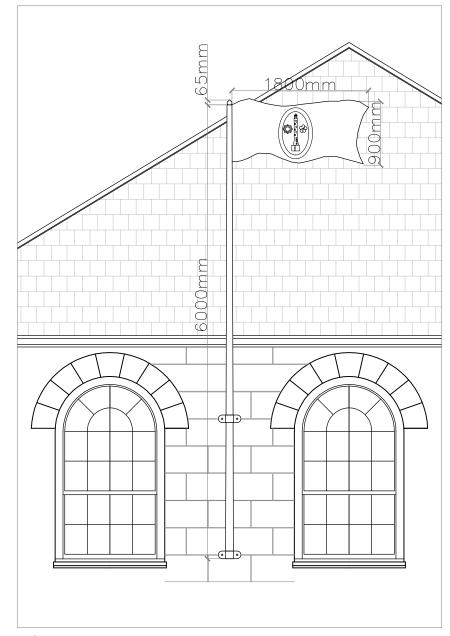


NOTE: The granite block spacing is diagrammatic and approximately to scale.

## FLAGPOLE FIXING DETAILS

1:20

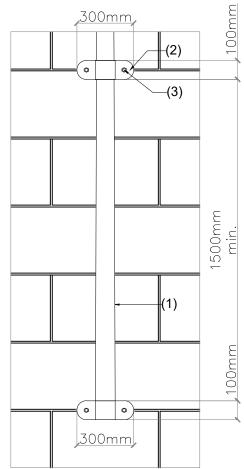

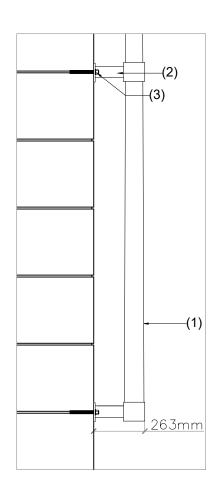


### NOTES:

- (1) Heavy duty glassfibre and polyester resin flagpole. 1500mm min. spacing between holding brackets fixed through to mortar joints.
- (2) Custom made galvanised steel holding brackets. 2nr brackets with 2nr fixings in each bracket (4nr fixings in total).
- (3) Stainless steel A4 (316) M12 Grade 8.8 threaded bar and washer with Rawl R-KEM II resin fixed through into the existing granite blocks.

### FLAGPOLE FIXING DETAILS

1:1



This drawing is the copyright of Currie & Brown Ltd.

Check all dimensions on site prior to project commencement. This drawing must be read in conjunction with all other drawings, details and specifications issues. Discrepancies between this and other drawings, details and/or specifications must be referred to the issuer.

Α	21.10.24	Fixing through mortar joints
Rev	Date	Description



Unit 6, Mills Bakery, Royal William Yard, Plymouth, Devon PL1 3GE Tel: 01752 278 100 Web: www.curriebrown.com

Project

Wesleyan Chapel Flagpole Installation

Title

Fixing Details

Clie

Council of the Isles of Scilly

Date 17.09.2024	Drawn	AH
Scale 1:50/1:20/1:10	Checked	AH
Drwg No.		Rev
PL_4101565_WC_03		